

CONSTRUCTION Tufting 1/10" loop pile
STRUCTURE Tufté 1/10" bouclé
STRUKTUR Getuftet 1/10" Schlinge
STRUCTUUR Getuft 1/10" lussenpool

PILE MATERIAL 100% PA 6 IMPREL®
COMPOSITION DU VELOURS
POLMATERIAL
POOLMATERIAAL

PRIMARY BACKING Non woven PES
SUPPORT Non tissé PES
TRÄGERMATERIAL Vlies, PES
TUFTDOEK Vilt, PES

SECONDARY BACKING Action Back
DOSSIER
RÜCKEN
TAPIJTRUG

PILE WEIGHT Ca. 925 gr/m²
POIDS DU VELOURS
POLEINSATZGEWICHT
POOLGEWICHT

TOTAL WEIGHT Ca. 2.350 gr/m²
POIDS TOTAL
GESAMTGEWICHT
TOTAAL GEWICHT

PILE HEIGHT Ca. 3,4 mm
EPAISSEUR DU VELOURS
POLHÖHE
POOLHOOGTE

TOTAL HEIGHT Ca. 6,6 mm
EPAISSEUR TOTAL
GESAMTHÖHE
TOTALE DIKTE

TUFT DENSITY Ca. 225 000/m²
NOMBRES DE POINTS
NOPPENZAHL
AANTAL PUNTEN

PILE DENSITY Ca. 0.178 g/cm³
DENSITÉ DU VELOURS
POLROHDICHTHEIT
POOLDICHTHEID

CLASSIFICATION EN 1307
CLASSEMENT 33 - LC3
KLASSIFIKATION
CLASSIFICATIE

CASTOR CHAIR SUITABILITY EN 985
CHAISE À ROULETTES A: intensive use
STUHLROLLENEIGNUNG
ROLSTOELGESCHIKTHEID

STAIR SUITABILITY EN 1963
ESCALIERS A: intensive use
TREPPENEIGNUNG
TRAPPENGESCHIKTHEID

PERMANENTLY ANTISTATIC ISO 6356
ANTISTATIC PERMANENT < 2 kV
PERMANENT ANTISTATISCH
PERMANENT ANTISTATISCH

IMPACT NOISE RATING ISO 140-8
ISOLATION PHONIQUE 22 dB ΔLw
TRITTSCHALLVERBESSERUNG
GELUIDSISOLATIE

SOUND ABSORPTION ISO 354
ABSORPTION PHONIQUE 0.15 αw
SCHALLABSORPTIONSGRAD
GELUIDSABSORPTIE

THERMAL RESISTANCE ISO 8302
RÉSISTANCE THERMIQUE 0.08 m² K/W
WÄRMEDURCHLASSWIDERSTAND
WARMTEDOORLAATWEERSTAND

FASTNESS TO LIGHT ISO 105-B02
SOLIDITÉ À LA LUMIÈRE ≥ 5-6
LICHTECHTHEIT
LICHTECHTHEID


COLOUR FASTNESS TO WATER EN ISO 105-E01
SOLIDITÉ À L'EAU ≥ 4-5
WASSERRECHTHEIT
WATERECHTHEID

RUBBING FASTNESS EN ISO 105-X12
SOLIDITÉ AU FROTTEMENT ≥ 4
REIBECHTHEIT
WRIJFECHTHEID

FIRE RESISTANCE EN 13501-1
COMPOTEMENT AU FEU Cfl-s1
BRENNVERHALTEN
BRANDGEDRAG

NUMBER OF COLOURS 12
NOMBRES DE COULEURS
ANZAHL FARBEN
AANTAL KLEUREN


WIDTH EN ISO 3018
LARGEUR ca. 400 cm
BREITE
BREEDTE



REG. NR
C59402EF
www.pro-dis.info



EN14041
CE
17
Balta Industries - Kanegem- straat 15 - BE 8700 Tielt
DOP: 1011#IE0ACL
Textile Floor Covering EN1307
Notified body 2401
www.baltamediabank.com

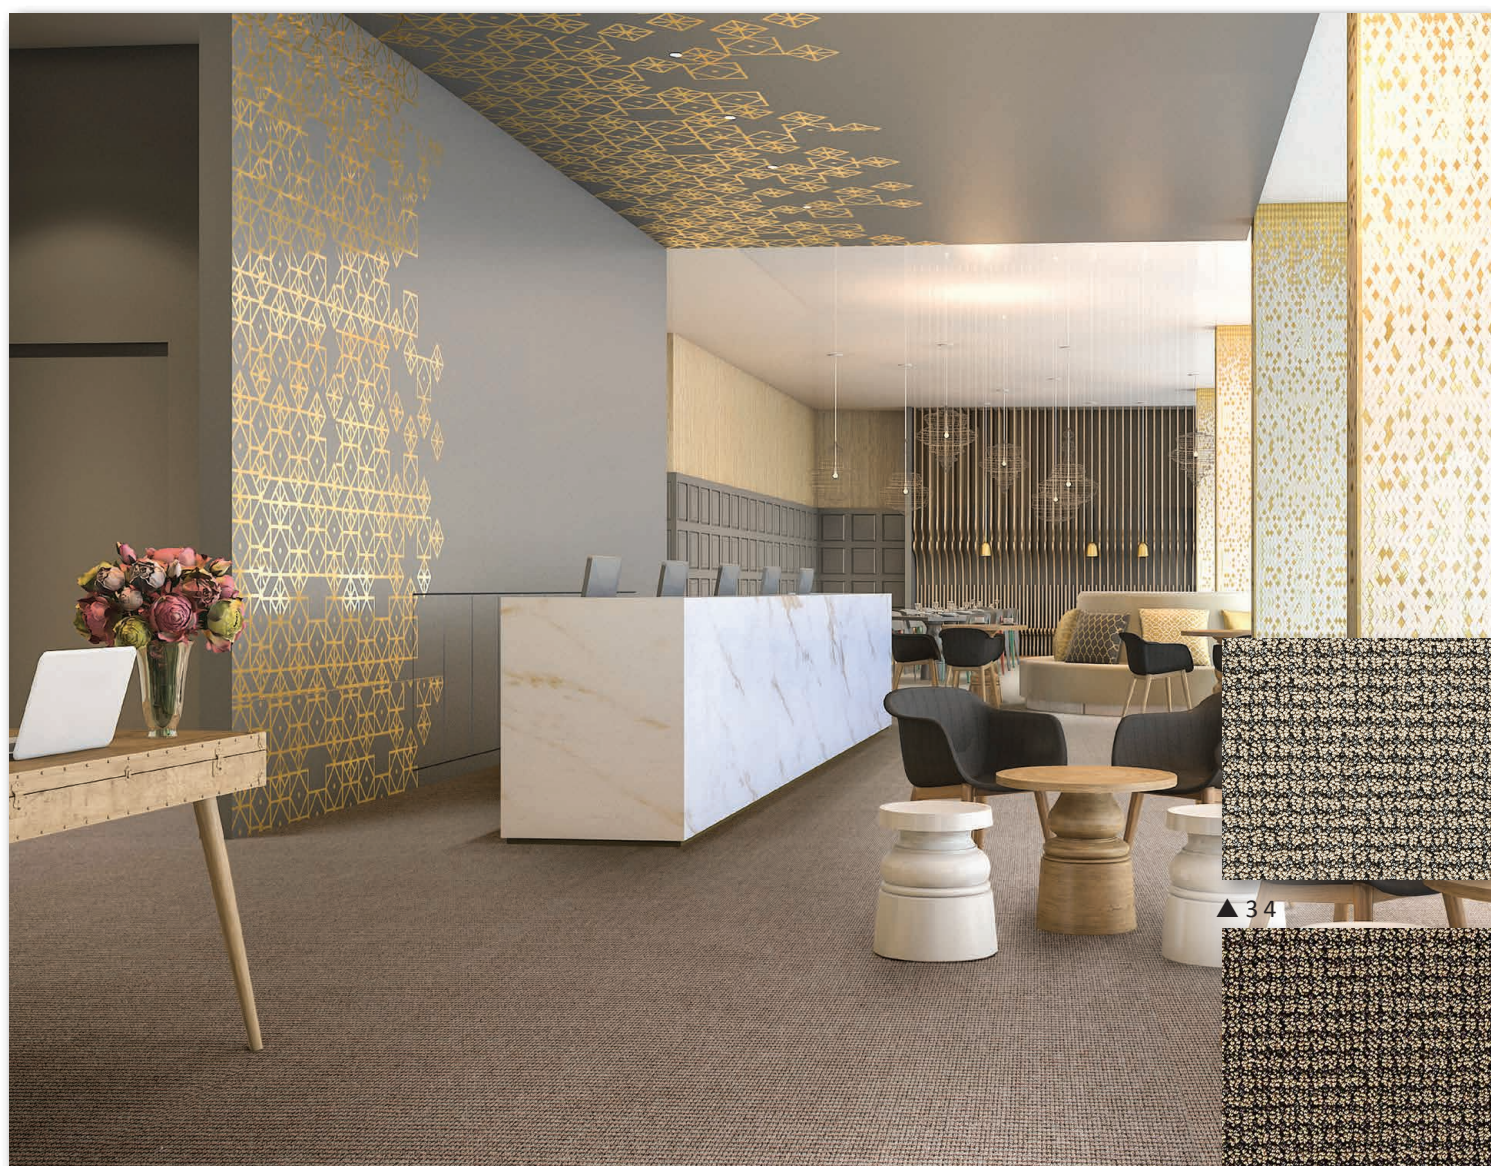

▲ 34


▲ 43



▲ 64



▲ 52




▲ 90




▲ 93




▲ 45




▲ 17



▲ 29



▲ 76



▲ 96



▲ 49